



ERS-390SA

OUTPUT :1.6W~39W (APPROX)


WEIGHT :98 g (APPROX)

Typical Applications Home Appliances : Hair Dryer, Vending Machine, Geared Motor

Typical Specifications

MODEL	VOLTAGE		NO LOAD		AT MAXIMUM EFFICIENCY						STALL		
	OPERATING RANGE	NOMINAL	SPEED r/min	CURRENT A	SPEED r/min	CURRENT A	TORQUE		OUTPUT W	EFF. %	TORQUE		CURRENT
							g.cm	mNm			A	g.cm	mNm
ERS390SA-4532	4.8~9.6	9.6V CONSTANT	20000	0.80	16800	5.60	223	23.86	38.73	72	36.39	1662	162.94
ERS390SA-5520	3.6~7.2	7.2V CONSTANT	23500	1.50	19500	8.17	191	18.73	38.35	66	42.45	1214	119.02
ERS390SA-14260	6.0~24.0	12.0VCONSTANT	3000	0.06	2300	0.22	64	6.27	1.54	60	0.91	334	32.75
ERS390SA-24135	6.0~24.0	12.0VCONSTANT	5800	0.11	4900	0.54	77	7.55	3.93	63	3.20	596	58.43
ERS-390SA-17200R	12.0~24.0	24.0V CONSTANT	8600	0.085	7510	0.432	99	9.71	7.62	72.76	3.41	719	70.47
ERS-390SA-7010R	1.2~2.4	2.4V CONSTANT	15000	2.10	12549	10.75	119	11.67	15	59.6	55	730	71.54

◎NOTE: 1)Casing ring 2) Ring varister 3) Capacitor for options only.

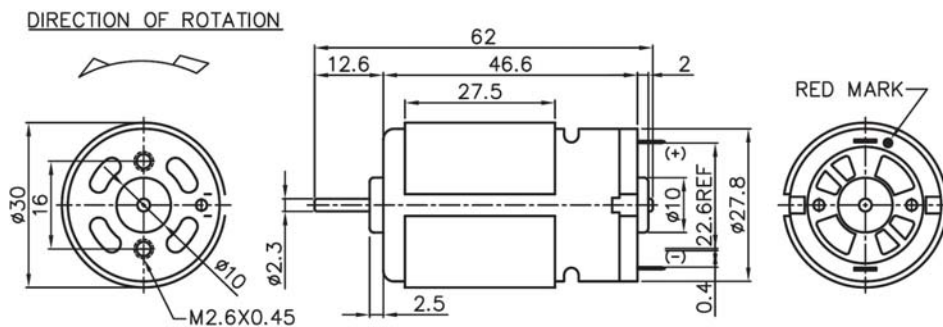

Usable machines screw length 4.0max.from motor mounting surface.

UNIT:MILLIMETERS