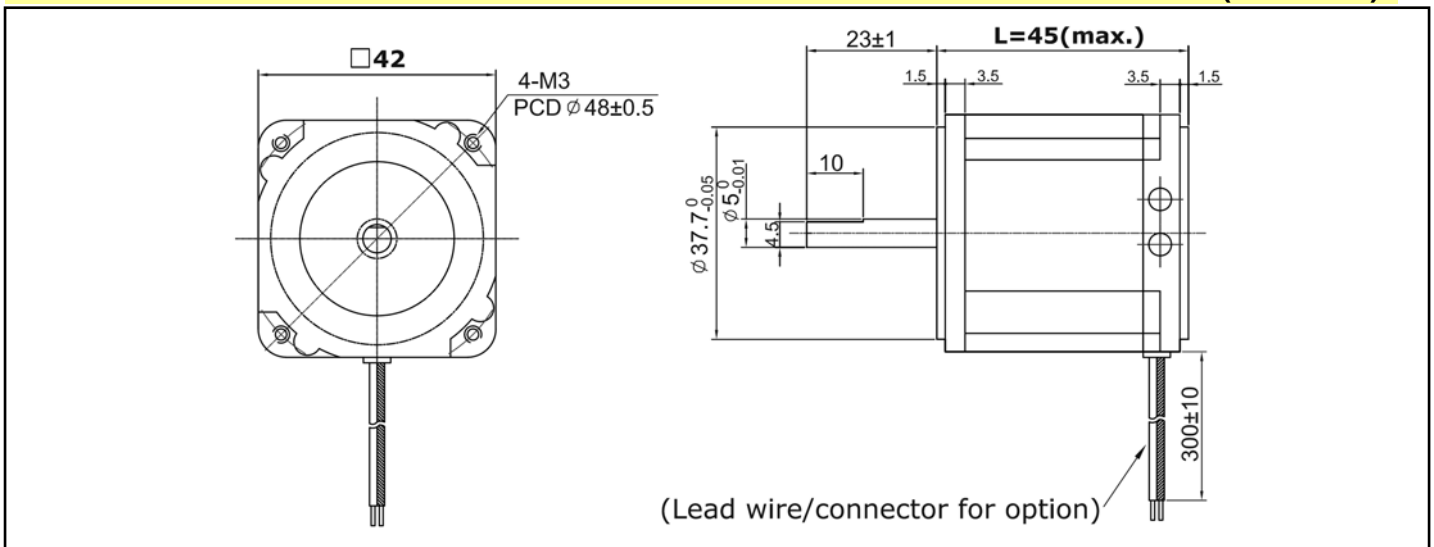


FBD42K Series (□42 mm)
MOTOR FEATURE:

- RATED OUTPUT POWER : 5~10W
- RATED VOLTAGE : 12~24VDC
- OPERATIONAL SPEED : 2000~2400RPM
- MAX. OUTPUT POWER : 30W
- Sleeve/Steel Ball bearing for option
- Replaceable Brush Type for option
- Pinion shaft or other requirement for option


Dimensions

(UNIT:mm)


Typical Specifications (F = ferrite magnet, N = rare earth magnet)

MODEL	Rated						Weight (kg)	Length L (mm)
	Voltage (V)	Output (W)	Current (A)	Speed (RPM)	Torque (kgf-cm)	Rating		
FBD42K-F012005	12	5	1.0	2000	0.26	cont	0.25	45
FBD42K-F012010	12	7	1.0	2400	0.26	cont	0.25	45
FBD42K-F024010	24	7	0.5	2400	0.28	cont	0.25	45
FBD42KD-F012005	12	5	1.0	2000	0.26	cont	0.25	45
FBD42KD-F012010	12	7	1.0	2400	0.26	cont	0.25	45
FBD42KD-F024010	24	7	0.5	2400	0.28	cont	0.25	45

NOTE: K"D" = Driver Inside (Integrated Driver), W/O "D" = Driver control type (Standard)

- Pls discuss with us when you place an order non-standardized products such as voltage, speed and others.
- Mass production by standardizing the various types and manufacture the products with special size by order.
- Design or Motor spec. can be changed for quality improvement without any notice.

Copyright © 2012 Formosa Servo Electric Motor Co., Ltd./ EVERMO Group All Rights Reserved.